

Everfit

Basketball System

Model: BAS-HOOP-305-S-RD



User Manual

WARNING:

**IMPROPER INSTALLATION OR
SWINGING ON THE RING MAY
CAUSE SERIOUS INJURY
OR DEATH**

*All the basketball systems, including those used for displays must be assembled and ballasted according to instructions. Failure to follow instructions could result in serious injury.

*Please read all warnings and cautions before assembly. It is recommended to supervise children as they play with this product. This product is to be assembly by 2 adults only!



SAFETY INSTRUCTIONS



FAILURE TO FOLLOW THESE SAFETY INSTRUCTIONS MAY RESULT IN SERIOUS INJURY OR PROPERTY DAMAGE AND WILL VOID WARRANTY.

Owner must ensure that all players know and follow these rules for safe operation of the system.

To ensure safety, do not attempt to assemble this system without following the instructions carefully.

Check entire box and inside all packing material for parts and/or additional instruction material.

Before beginning assembly, read the instructions and identify parts according to this manual.

Proper and complete assembly, use, and supervision are essential for proper operation and to reduce the risk of accident or injury.

A high probability of serious injury exists if this system is not installed, maintained, and operated properly.

If using a ladder during assembly, please be more carefully.

Two(2) capable adults are recommended for this operation.

Check base regularly for leakage. Slow leaks could cause system to tip over unexpectedly.

Seat the pole sections properly (if applicable). Failure to do so could allow the pole sections to separate during play and/or transport of the system.

Climate, corrosion, or misuse could result in system failure.

This equipment is intended for home recreational use only and not excessive competitive play.


The life of your basketball pole depends on many conditions. The climate, placement of the pole, location of the pole, exposure to corrosives such as pesticides, herbicides, or salts are all important.

If technical assistance is required, contact Customer Service.






Adult supervision is recommended when adjusting height.

Most injuries are caused by misuse and/or not following instructions. Use caution when using this system.

Get to Know the Basic Parts

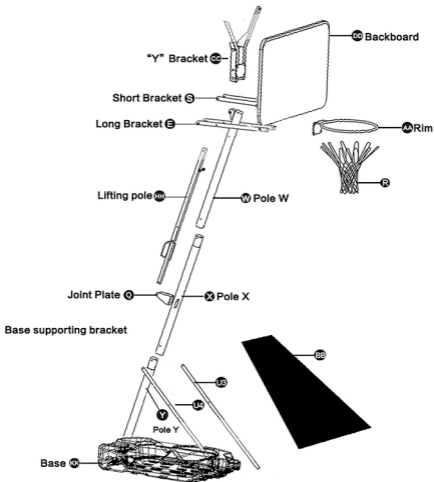

Part List



Bolt and Washer Kit



M8*120 2pcs



M8*100 1pcs



M8*80 5pcs



M8*45 1pcs




M8*20 4pcs



M8*16 2pcs







M8*50 2pcs



Before assembly, please list all the parts and identify each one, to avoid mistakes or repeated work.
Please fasten the nut until the washer is fixed. Fasten too much may cause deformation or breakage.

Net Installation Outside View



Step 1


Insert shaft (V2) into bottom pole(Y) as below left picture. Then insert the bottom pole(Y) into base.

Insert shaft(V3) into bottom pole (Y) as below right picture. Then fix the shaft(V3) into base groove.

The front face of base(KK)



Step 2



(1). Fix the bottom end of base supporting bracket (U1),(U2),(U3),(U4) on the base by bolt set(K) as left picture.


Please pay attention to the directions of the four base supporting brackets.

(2). Insert the middle pole (X) into bottom pole (Y), fix the middle pole (X), bottom pole and top end of four base supporting brackets together by bolt set (B) and connect middle pole (X) and bottom pole (Y) by bolt set (C).


(3) Fix the joint plate (Q) on the middle pole (X) by 2pcs of bolt set (C) and 1pc square gasket (L) as above picture. Please note the joint plate (Q) must be backward.

NOTE: The 2 wheels (M) are installed on the front of base (KK) by shaft (V1)

Step 3




Fix the rim(AA), backboard(DD) by bolt(T) and bolt(A). Through the "Y" bracket(CC) install the bolt(A) on the top hole of the rim.




Step 4



As shown in the below figure, pull the "Y" bracket(CC) to both sides



Fix the top end of "Y" bracket(CC) behind the backboard(DD) by bolt(N)




As shown in the figure, connect the short bracket(S) and long bracket(E) to "Y" bracket(CC) by bolt(O4) and(O3). Please note that sleeve must be installed inside the "Y" bracket(CC).




Step 5

Install short bracket(S) and long bracket(E) by bolt set(O2)and (O6) as shown, tighten all the nuts.




Step 6

Install the pole (W), (X) together by 2pcs of bolt set(C). Then install the lifting pole(HH)&(Q) by bolt set(J), install the lifting pole(HH)&(E) by bolt set(O5) as shown in below. Tighten all nuts.




Step 7

Fix the bolt (O1) on the two short bracket (S) for the next installation of hanging big springs (P)






As shown in below picture, fix one end of big springs (P) on the hole of "Y" bracket (CC). Then hang the other end of big springs (P) on the bolt (O1)



NOTE

For easier installation, please make sure the backboard is at highest position before hanging the spring




For safety reason, sand instead of water is recommended to fill up the base during the sub-freezing weather. Please note that sand will not be poured out once filled in the base

Step 8

HEIGHT ADJUSTMENT

Adjust the height of main pole by the handle



Product moving

1. Adjust the product in lowest level before moving
2. Avoid friction with the ground while moving
3. Move to the right place then rise the product slowly

